


OceanTools

C-Gauge

Underwater laser based measurement system

The *field-proven* **OceanTools C-Gauge** laser based measurement system offers *sub-millimetric* underwater measurements.

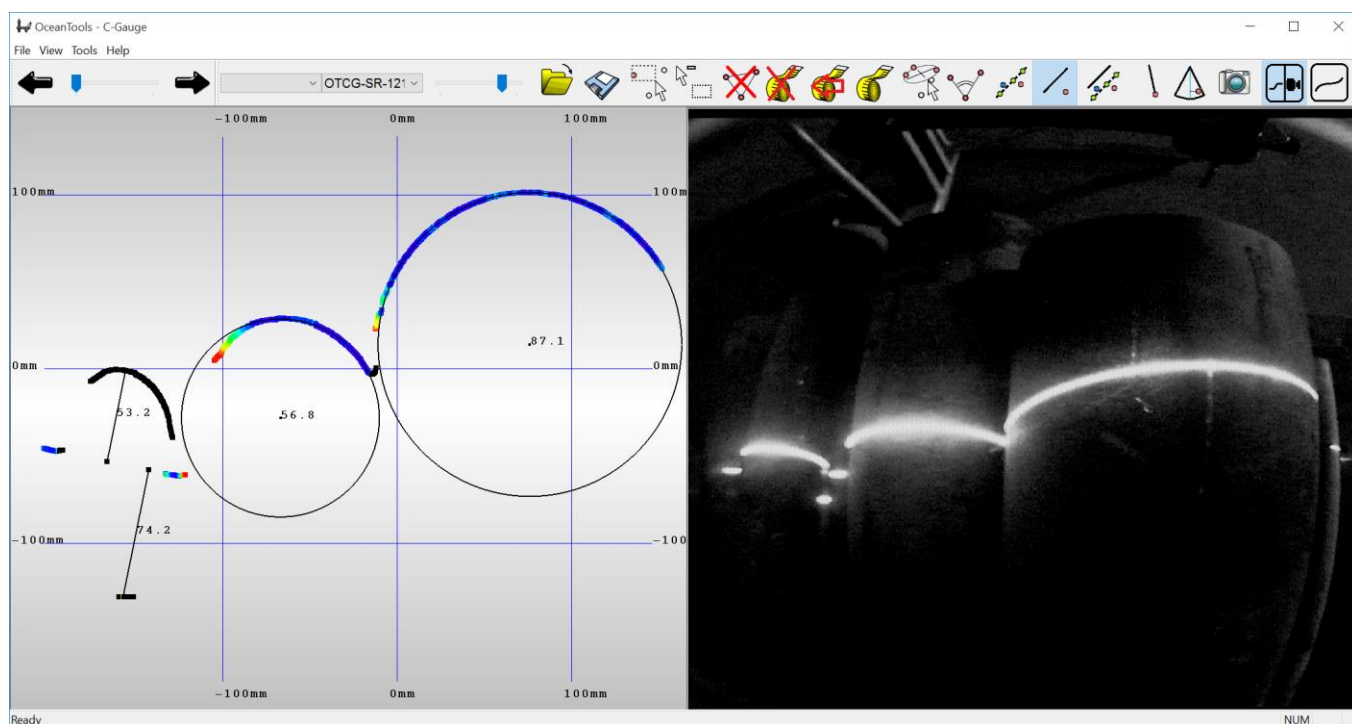

Software screenshot showing radii of different pipes and distances to a line.


Overview

The highly compact and rugged package comprises an **OceanTools C-Laser**, underwater camera, deployment frame and analysis software.

The system has been designed for a wide range of subsea measurement applications including:

- Cracks and gaps
- Pipeline ovality, diameter and radial measurement
- Precise distance and angular measurements

Depending on the range, **C-Gauge** can generate results with an accuracy of 0.5mm. The package is very compact and has been designed to fit onto the smallest of ROV systems. The system requires a single 24VDC input and a video link to the surface.




OceanTools

C-Gauge

Underwater laser based measurement system

Key Features


- 700 data points per scan
- Accuracy to 0.5mm
- 3000m depth rating
- Custom designed mounting brackets
- 2D and 3D display modes
- Export data to Excel

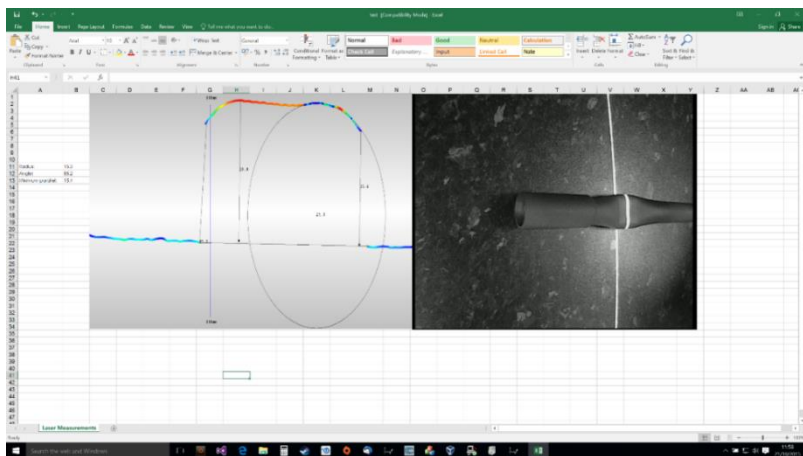


Straightforward data export to Excel

The laser is a visible blue (450nm) solid-state Class IIIb / 3B laser with an output power of up to 100mW. Direct eye exposure should be avoided, but the laser is considered safe if handled carefully.

C-Gauge is deployed on a custom designed mounting bracket to suit the task at hand. In order to measure the radius or diameter of circular objects such as platform legs or pipes, it is *imperative* that it is mounted perfectly perpendicular to the object being measured, in which case a special perpendicular alignment tool should be used.

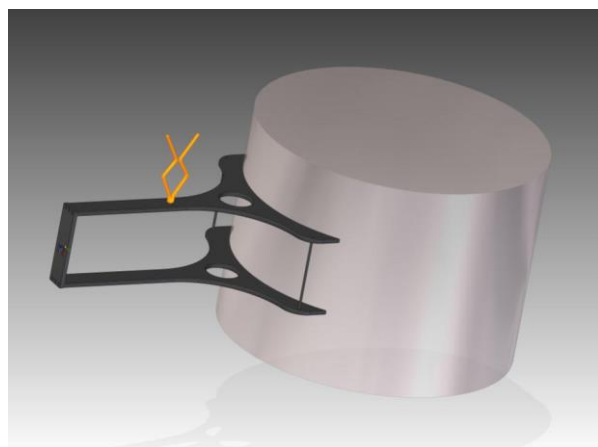

Perpendicular alignment tool

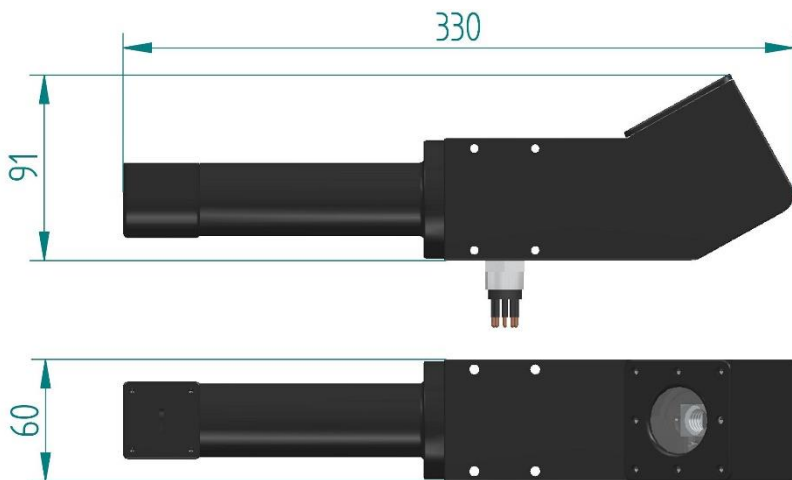


Mk II integrated unit and mounting pole (dimensions in mm)





Typical usage scenario

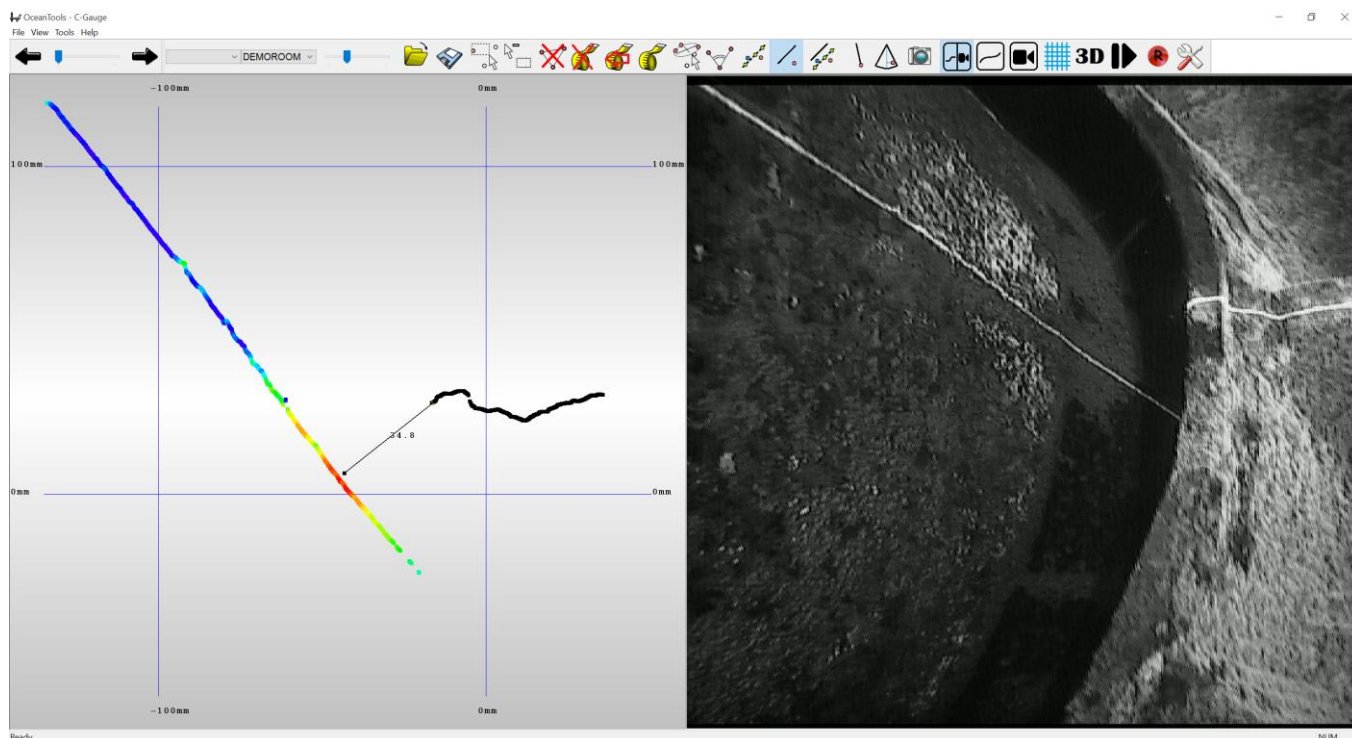

Gap in between a caisson and a clamp. The measurement shows the distance to the clamp and the different colours on the line show the deformation of the caisson as a result of collisions with the clamp.

Specifications	
Maximum range	1.5m
Range resolution	0.5mm
Laser colour/wavelength	Blue/450nm
Laser power	70mW
Fan beamwidth (underwater)	45°
Depth rating (standard)	3000m
Input voltage	24VDC
Operating current	250mA @ 24VDC
Materials	Hard anodised aluminium
Weight in air	2kg
Weight in water	1kg
Operating temperature	-5° C to 35° C

Product datasheets, GA drawings, case studies and other supporting documents are available to download from data.oceantools.co.uk

All specifications are subject to change without notice. E&OE.

Version 10 (17.10.2017)